


Flanschen-Durchgangsventil
Globe Valve, flanged


Edelstahl
Stainless Steel

Fig. 131827

PN 16

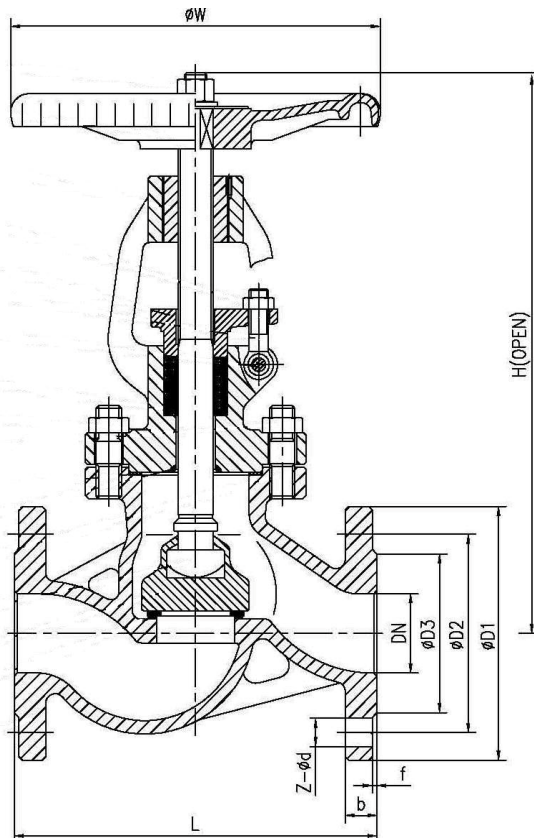

DN 15 – 150

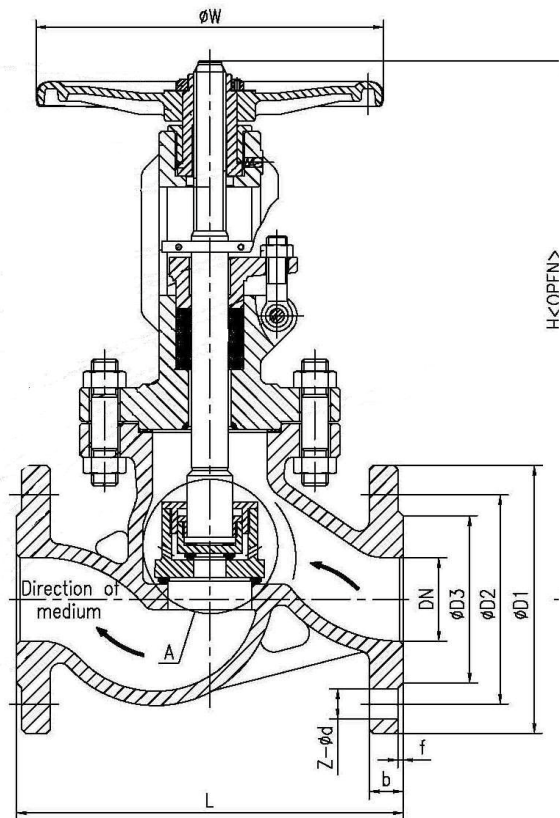

DN 200 – 300

Baulänge nach / face to face acc. to
EN 558-1 ser. 1

Flanschen nach / Flanges acc. to
DIN 2543

Temp. -10°C - +425°C

Gehäuse – Body	1.4408
Sitz – Seat	SS304
Spindel - Stem	A182 F304



DN	D3	D2	D1	f	b	Z-d	H	W	L
15	45	65	95	2	16	4-14	210	120	130
20	58	75	105	2	18	4-14	230	120	150
25	68	85	115	2	18	4-14	250	140	160
32	78	100	140	2	18	4-18	275	160	180
40	88	110	150	3	18	4-18	300	180	200
50	102	125	165	3	18	4-18	325	200	230
65	122	145	185	3	20	4-18	385	220	290
80	138	160	200	3	20	8-18	410	250	310
100	158	180	220	3	20	8-18	455	300	350
125	188	210	250	3	22	8-18	510	350	400
150	212	240	285	3	22	8-22	560	400	480
200	268	295	340	3	24	12-22	626	450	600
250	320	355	405	3	26	12-26	712	500	730
300	378	410	460	4	28	12-26	990	600	850